


FIREWALL-TO-BODY ASSEMBLY DETAIL (4 PLACES ON B || HM)

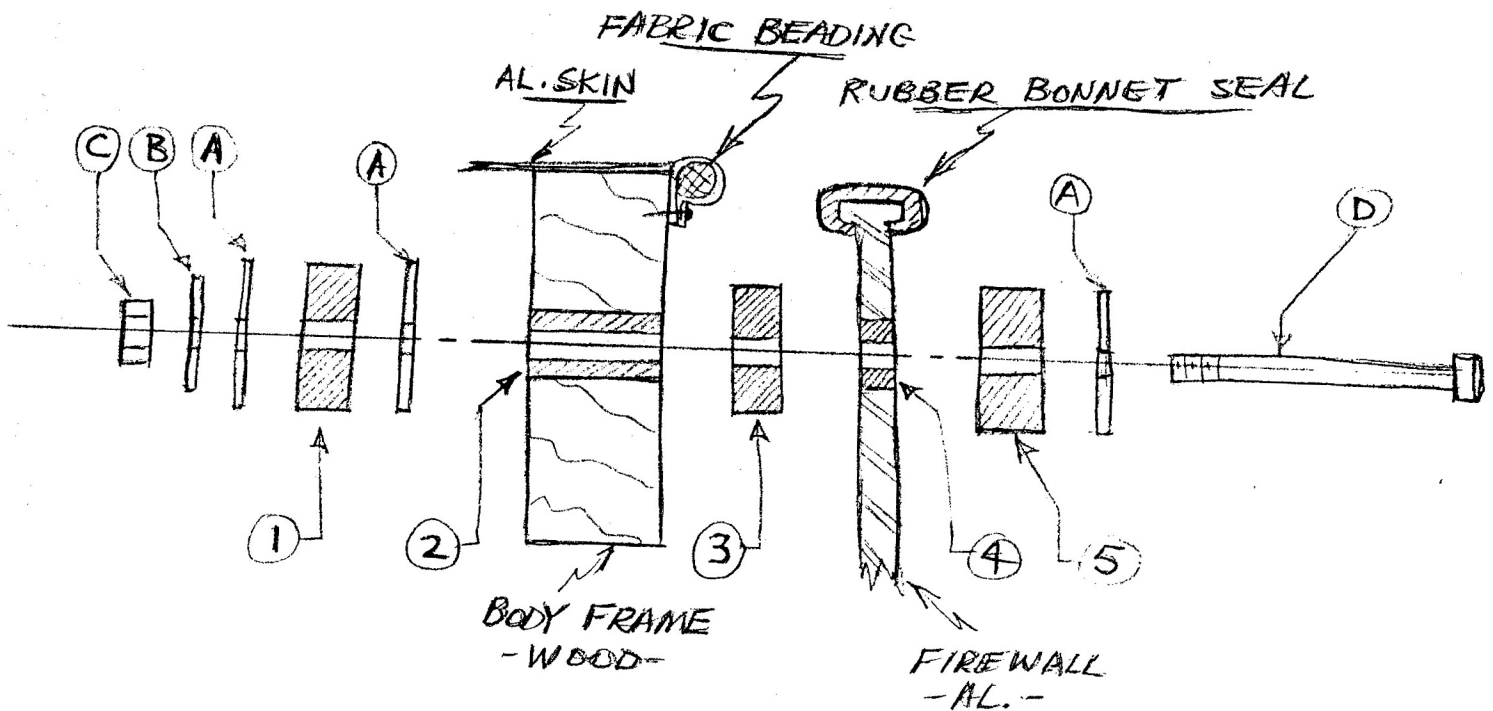

- (A) STEEL WASHERS $\sim 1"$ OD (3 REQ'D)
- (B) SPECIAL NUT: $\frac{1}{4}$ -26 BS; $\frac{7}{16}$ BS WRENCH SIZE; $\frac{1}{8}"$ THICK
- (C) REGULAR HEX NUT: $\frac{1}{4}$ -26 BS
- (D) $\frac{1}{4}$ -26 BS X $3\frac{1}{4}"$ LONG, CHEESE HEAD BOLT
- (1) RUBBER PAD, $\sim 1\frac{1}{8}"$ OD X $\frac{1}{2}"$ THICK
- (2) RUBBER INSERT $\sim \frac{5}{8}"$ OD X FRAME THICKNESS
- (3) RUBBER PAD $\sim \frac{7}{8}"$ OD X $\frac{5}{16}"$ THICK
- (4) RUBBER INSERT $\sim \frac{5}{8}"$ OD X FIREWALL THICKNESS
- (5) RUBBER PAD $\sim 1"$ OD X $\frac{3}{8}"$ THICK